


# INSTALLATION INSTRUCTIONS

## 102153 HD Fuel Pump Relay System

This kit is designed to be used as a high current fuel pump controller. The 40 amp sealed heavy duty relay will control a high output fuel pump, generally rear mounted in the vehicle. Relay is sealed and uses 10 gage wiring.

The trigger wire, red with black stripe, can be run to a dash mounted toggle switch, or attached to Caspers 108131 Fuel Pump Trigger Tap when used on Buick Grand National applications.

Kit is supplied with extended battery bolts so you can attach the Positive and Negative feeds directly to the trunk-mounted battery. External 40A fuse is accessible using a sealed fuse holder. See illustration below when installing this harness.

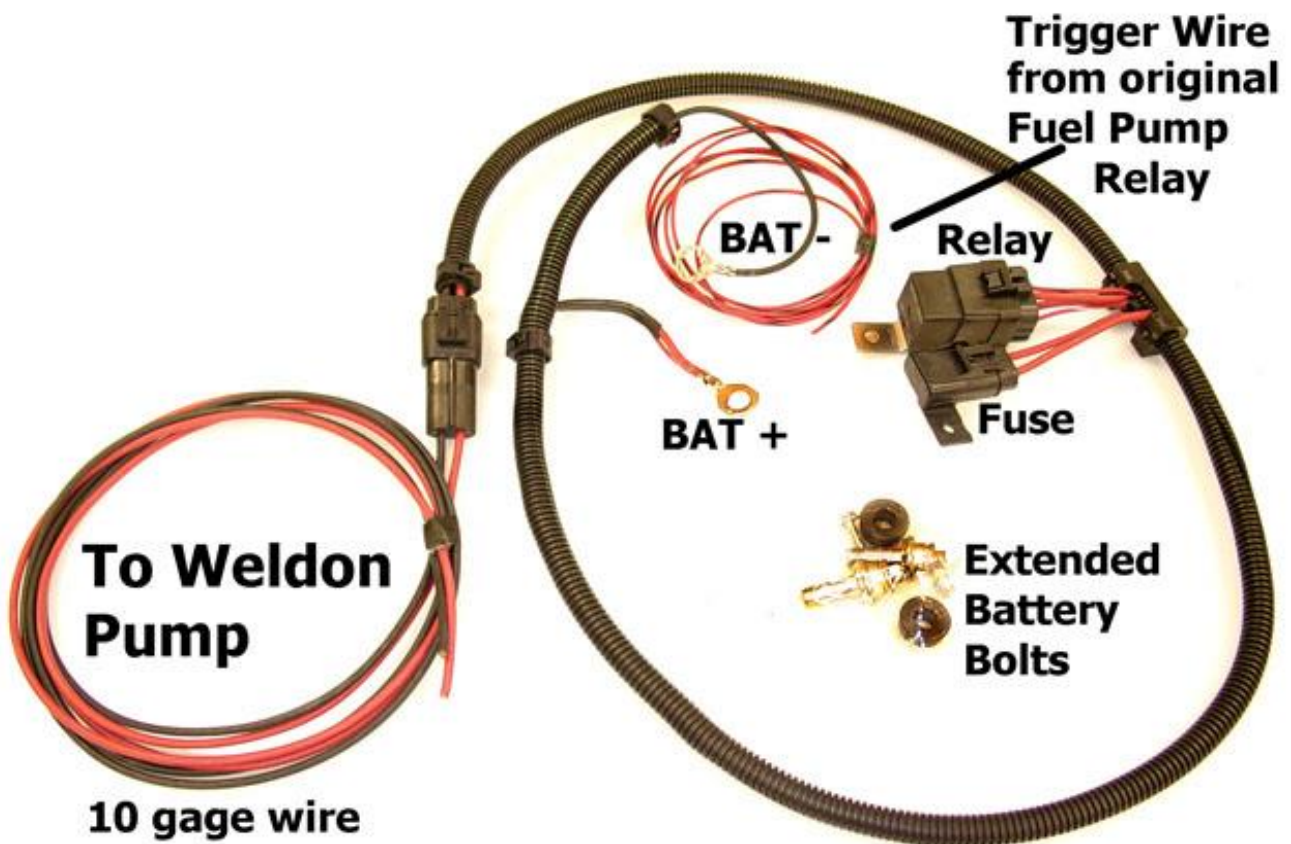

Shown here is the 108131 Fuel Pump Trigger Tap which can be added to your Buick Regal gas tank feed connector. Using this tap, the relay will operate when the vehicle's fuel pump relay is activated.

