


INSTALLATION INSTRUCTIONS

108110 Heated Oxygen Sensor Wiring Harness

1986-1989 turbo Buick/TTA

OXYGEN SENSOR NOT INCLUDED IN KIT

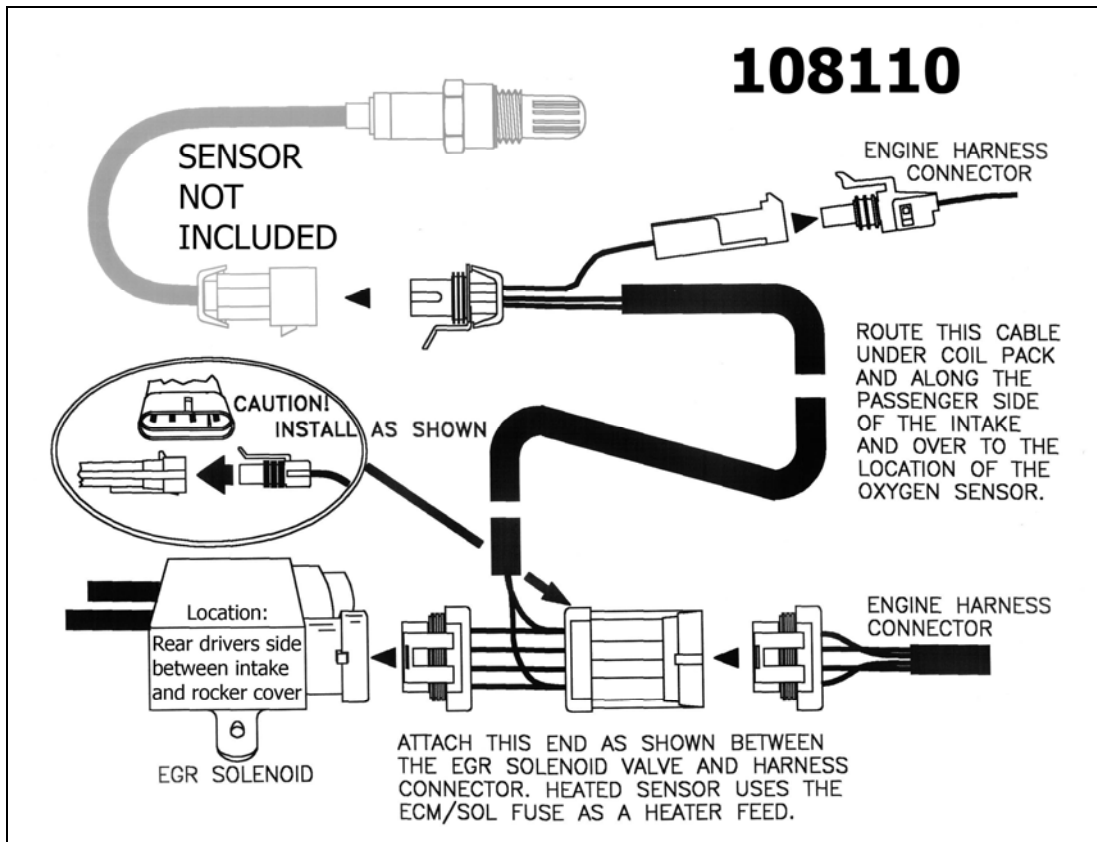

This harness is designed to plug into the EGR solenoid located rear of the engine, drivers side, attaching to one of the rocker cover bolts and intake. Route this harness forward toward the oxygen sensor location and plug single connector into existing sensor connector.

This "Plug-And-Play" harness is designed to be used with GM four wire heated oxygen sensors commonly used on the 1997-2005 GM 3800 engine. Sensor must have a black connector to be compatible with this harness. NOTE: Oxygen sensor is not included in this kit.

Sensors are available from www.casperselectronics.com by ordering part number 103008 (Denso heated oxygen sensor).

