


INSTALLATION INSTRUCTIONS

108114 ECU ADAPTER MODULE - FAST to XFI


This "Plug-And-Play" adapter module is designed to permit the **XFI Fuel Management Computer** to directly interface with the earlier "SpeedPro" or FAST-equipped vehicle. The two-plug connector pair which originally plugged into the FAST system will now plug directly into this adapter. Once the adapter is installed, it plugs directly into the XFI ECU. Installation is easy and reliable. The adapter is supplied with a laptop connector which connects to the interface cable supplied by FAST.

There are three LED status indicators on the module which confirm the presence of 12 volts, 5 volts, and standby "MEMORY" voltage. All three LED's must be illuminated when the vehicle is running.

Note: the white "POINTS" wire attaches to the POINTS input of the MSD box (if used).

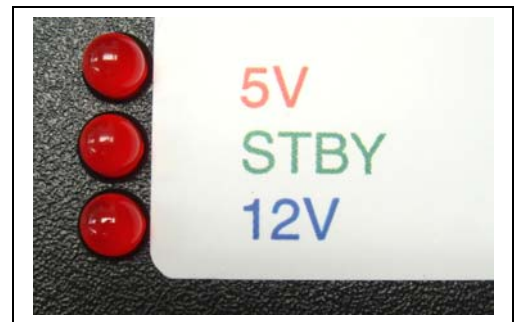

109072
CCCI DEAD-END

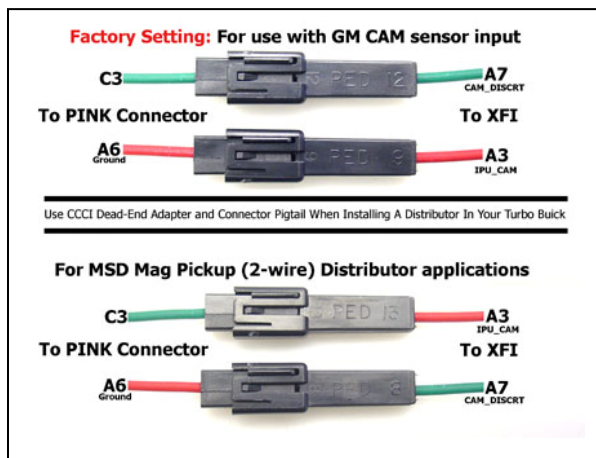

When using a distributor, you must swap the red and green connections as shown here. You will also need the **109072 CCCI Dead-End Module** which re-routes the ignition wiring and supplies a two-wire pigtail to connect to the distributor. Note the white wire labeled "Points" provides a tach signal.



The adapter is equipped with a 3 cavity connector (as shown here) which connects to the FAST laptop interface cable.

When installing the adapter unit, be sure to attach the ground ring (as shown here) to a good chassis ground.

