


XFI "A" CONNECTOR	PINK CONNECTOR	NOTES: FOR DISTRIBUTOR CARS ONLY	GN	
A1	A10	GND		B/W
A2				
A3 M 150	A6 F 150	<i>DISTRIBUTOR POSITIVE</i> ** PULL-UP 2.2K		ORANGE/BLK
A4	A7	GND		B/W
A5	C4	VSS		BRN
A6				
A7 M 150	C3 F 150	DISCRETE CAM SIG. MUST BE GROUNDED	A11	B/W
A8	D7	<i>CRANK SIGNAL</i> WITH DISTR. ONLY	B5	Ppl/Wht C
A9	C6	ESC	B7	Yel/Blk
A10				
A11		WHITE WIRE "POINTS" LABEL		
A12 MAP GND		FLASH_COMMON (E) COM. FLASH TWHEEL		
A13	C9	CRANK LO - DIST, CRANK, CAM GROUNDS	B3	Blk/Red D
A14	D8	CRANK HI	B4	Not Used
A15	A9	EST BYPASS	D5	Not Used
A16	B6	GND - IPU		B/W
A17	B7	GND - IPU		B/W
A18				
A19				
A20				
A21	D4	(A) FLASH ENABLE and ALDL C437 Cav. C	A9	Wht/Red
A22		CAL_SEL0 (B) FLASH		
A23		CAL_SEL1 (C) FLASH		
A24	C5	AC SENSE to AC RELAY		Blue
A25				
A26		A7 MUST BE GROUNDED WHEN DISTR.		
A27		IS USED. A3 WILL BE INDUCTIVE INPUT.		
A28				
A29		**BE SURE TO ADD 2.2K RESISTOR TO ORANGE/BLACK WIRE (DIST) AND +12V		
A30				
A31				
A32				

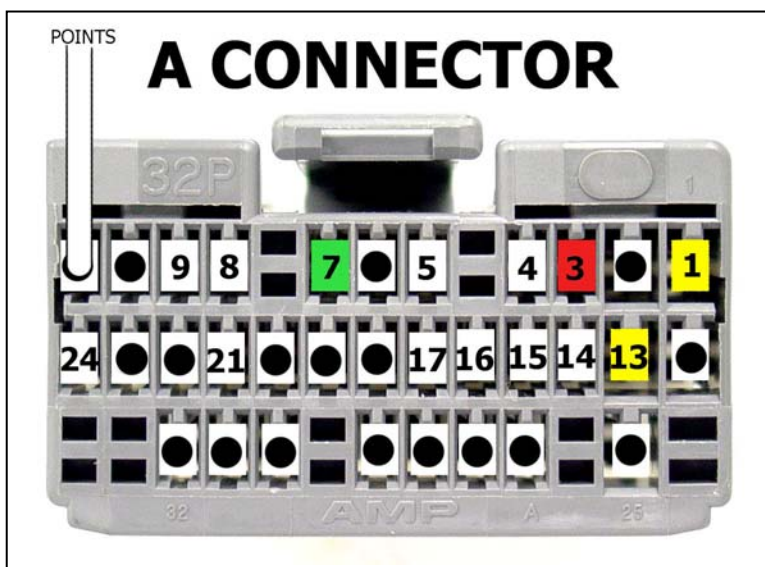

ADAPTER WIRING

- 46 BLK (040 terminal)
- 8 B/W (070 terminal)
- 1 RED w/150 1CAV conn.
- 1 GRN w/150 1CAV conn.
- 1 PINK 6 in. (B conn.)
- 1 WHT 6 in. "POINTS"